

Therma-Roll (Security Shutters)

The Therma-roll Insulated shutter range has a choice of 3 profile sizes 42mm, 52mm and 77mm. All of the Therma-roll profiles are Aluminium double skin profiles, with cfc free insulated core sections, designed to give acoustic and thermal benefits. Therma-roll also has a choice of operating systems and control options to match all requirements.

Therma-roll 42mm profile



42mm profile sections are designed to interlock to give maximum insulation and acoustic properties, with a thickness of 5mm across the profile the Therma-roll 42mm is ideally suited for domestic and cabinet applications. Small profiles have improved rolling characteristics allowing smaller head space requirement, the 42mm profile only requires as little as 150mm housing box. Every Therma-roll shutter comes complete with reinforced bottom rail section giving added security when closed. When using a manual counterbalance operating system the locking section will be incorporated in a specially designed extruded base rail which has recessed locking bars giving added security.




Colour Finish Option



*Standard colour finishes

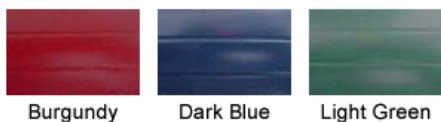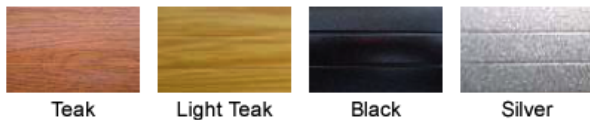



All Therma-roll shutters are supplied with a full housing casing as standard. A choice of shape is also available, with the conventional angular head plate or the curved head plate and housing box. In conjunction with curved guide cover this can make any application more aesthetically pleasing.



Dome face guide caps are also available serving a dual role of covering any fixing points, giving added security as well as giving the guide section a more aesthetically pleasing finish when used in a face fix environment.



Therma-roll 43 has a choice of guide sections to suit most applications. All guide sections come complete with brush strips.

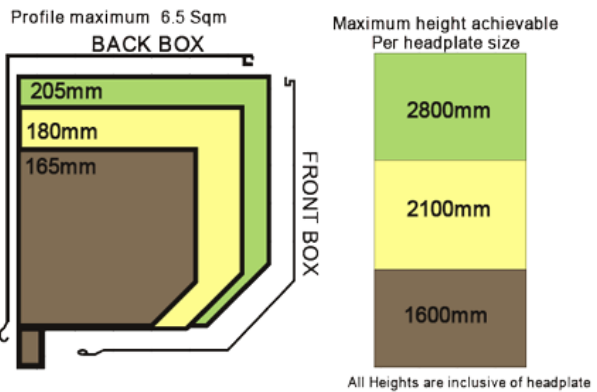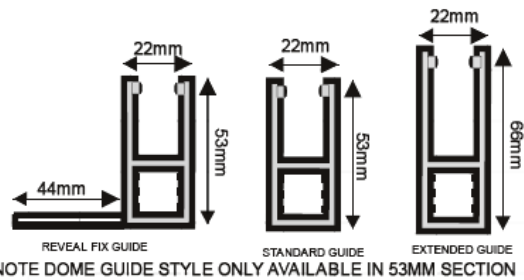

All of the above height calculations are based upon a 60mm octagonal axle. If exceeding a span of 3000mm please allow for a 70mm axle which may alter the headplate size Please call to verify your plate details prior to ordering.